


Kombiniertes Saug-Spül-Einbau

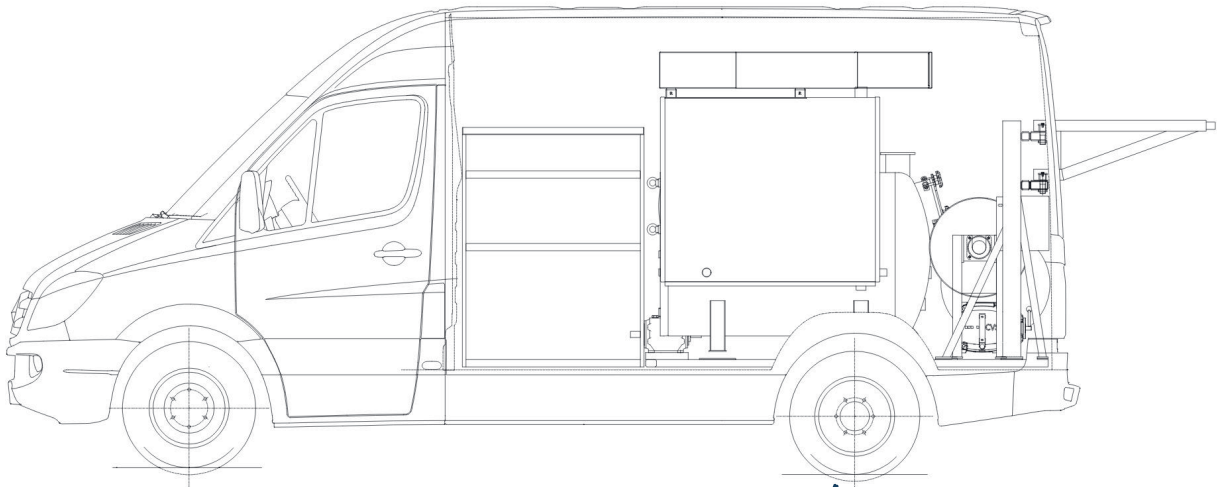

Fahrgestell

Hersteller	IVECO
Typ	Daily
Achsformel	4x2
Leistung PS	176

Hochdrucksystem

Hersteller	Speck
Typ	NP 25-38/180
Leistung	ca 38l/min. bei 180 bar
Spülschlauch	35m DN10

Gewichte

Technisches kg	5.800
Zulässiges kg	5.200

Aufbau

Hersteller	Krüger Fahrzeugbau
Typ	SSP1-0,5
Werkstoff	Edelstahl 1.4301
Entleerung	freier Auslauf

Vakuumsystem

Hersteller	CVS
Typ	L400
Leistung	ca. 345 m ³ /h

Besonderheiten

Kran manuell schwenkbar | Standheizung
Seilwinde 150 kg


Masse / Gewichte

LxBxH mm	6.100 x 2.050 x 2.730
Radstand mm	3.520
Nutzlast kg	1.300

Notizen



Combined sucking & jetting module

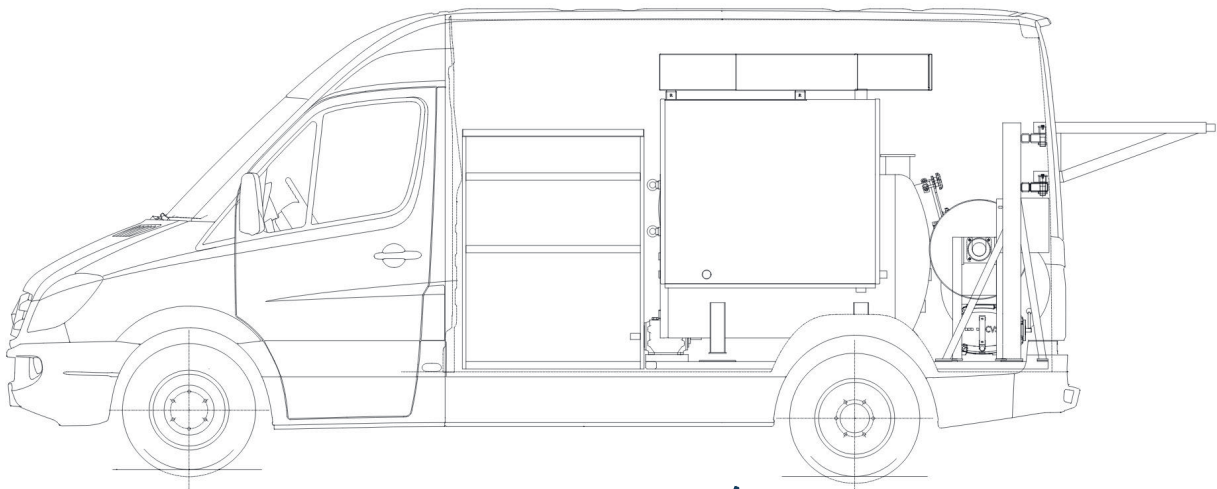

Chassis

Manufacturer	IVECO
Type	Daily
Axle Configuration	4x2
HP	176

Weights

GWV	5.800
Weight technical	5.200

Superstructure

Manufacturer	Krüger Fahrzeugbau
Type	SSP1-0,5
Tank material	Stainless Steel 1.4301
Emptying	Free Outflow

Total Volume	1.500
Water Chamber	500
Mud Chamber	1.000

Sizes/Weight

L x W x H mm	6.100 x 2.050 x 2.730
Wheelbase mm	3.520
Payload KG	1.300



High-Pressure System

Manufacturer	Speck
Type	NP 25-38/180
Performance	appr. 38l/min. @ 180 bar
High-Pressure Hose 1	35m DN10

Vacuum System

Manufacturer	CVS
Type	L400
Performance	appr. 345 m ³ /h

Special Features

Crane Boom | Winch for 150 kg Auxiliary Heater

Notes

Kanalreiniger.eu®
HANDEL | VERMIETUNG